

Total Solutions System **STATIONARY BATTERIES**



WINNER[®]

BATTERY

SWITCH FOR SUCCESS

GEL DEEP CYCLE

- Deep cycle VRLA GEL 2/6/12 Volts series
- Superior characteristics of very low self discharge
- Heavy Duty grids - For intensive cyclic use
- Deep discharge recovery - ABS battery case
- Extreme cold/hot climates operation
- More than 1100 cycles with 50% D.O.D.



www.winnerbattery.net

MERCURY

SEALED VRLA MF GEL TYPE RECHARGEABLE BATTERY



WINNER[®]
BATTERY
MERCURY

90-12 (12Volts, 90AH/20HR)
SEALED VRLA MAINTENANCE FREE GEL TYPE RECHARGEABLE BATTERY

DEEP CYCLE

TYPE	VOLTAGE REGULATION	INITIAL CURRENT
STANDARD USE	13.5-13.8V	15A
CYCLE USE	14.1-14.2V	15A

CAUTION
Do not charge in a gas tight container.
Do not short the battery terminals.
Panic and order at once
Consulted with emergency service.


Nonspillable




Type No	Voltage	Capacity	Max Discharge Current in 5'	Dimensions (mm)				Layout	Terminal	Weight (Kg)
	V	AH (C20)	A	L	W	H	T.H.			
150-6	6	150	1500	260	180	247	252	2	F18	23,50
180-6	6	180	1800	307	169	222	227	2	F18	26,50
200-6	6	200	2000	260	180	247	252	2	F18	30,00
225-6	6	225	2250	244	189	275	275	2	F18	32,00
225-6B	6	225	2250	322	178	222	227	2	F18	32,00
40-12	12	40	400	198	166	171	171	0	F13	13,20
55-12	12	55	550	229	138	210	215	1	F13	18,00
70-12	12	70	700	350	167	180	183	1	F13	22,50
80-12	12	80	800	260	169	210	215	1	F13	24,80
90-12	12	90	900	307	169	210	215	1	F18	28,50
100-12	12	100	1000	328	172	222	222	1	F18	30,00
120-12	12	120	1200	407	177	225	225	1	F18	35,00
145-12	12	145	1450	341	173	280	285	1	F18	44,00
150-12	12	150	1500	483	170	240	240	1	F18	45,00
180-12	12	180	1800	530	209	214	219	4	F18	53,00
200-12	12	200	2000	522	240	219	224	4	F18	60,00
230-12	12	230	2300	521	269	203	208	4	F18	69,00
260-12	12	260	2600	521	269	219	224	4	F18	74,00
200-2	2	200	1000	171	107	330	365	5	F17	14,00
300-2	2	300	1500	171	151	330	365	5	F17	19,00
400-2	2	400	2000	211	175	330	365	5	F17	26,00
500-2	2	500	2500	242	175	330	365	5	F17	30,50
600-2	2	600	2400	302	175	330	365	5	F17	37,00
800-2	2	800	3200	410	175	330	365	6	F17	50,00
1000-2	2	1000	4000	475	175	330	365	6	F17	62,00
1200-2	2	1200	4000	475	175	330	365	6	F17	76,00
1500-2	2	1500	6000	401	350	340	382	9	F17	96,00
2000-2	2	2000	7000	490	350	340	382	9	F17	127,00
3000-2	2	3000	8000	710	350	340	382	10	F17	193,00

More types available on request

KEY FOR LAY OUT

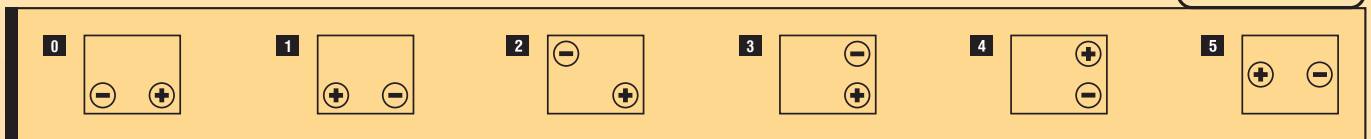

KEY FOR LAY OUT

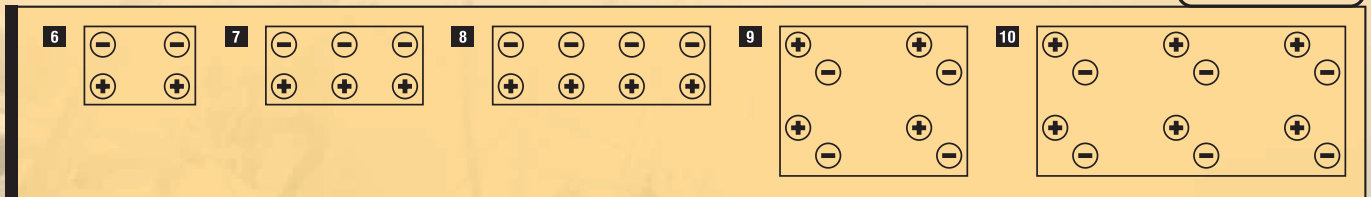

APPLICATIONS

Energy storage for solar & wind systems
Cleaning machines & wheelchairs

Marine cyclic & stand by applications
Recreational vehicles
Navigational & road signaling

Weather & climate data stations
LAN, CATV & special networks
Medical facilities